

Brida plana roscada DIN-2576, Acero inoxidable AISI-316

EN 1092-1-01 PN10



Roscada

Según EN 10226-1 (ISO 7/1)

DIN 2576 - PN10

Acero Inoxidable 1.4404 / A-316L

Tipo A (cara plana)

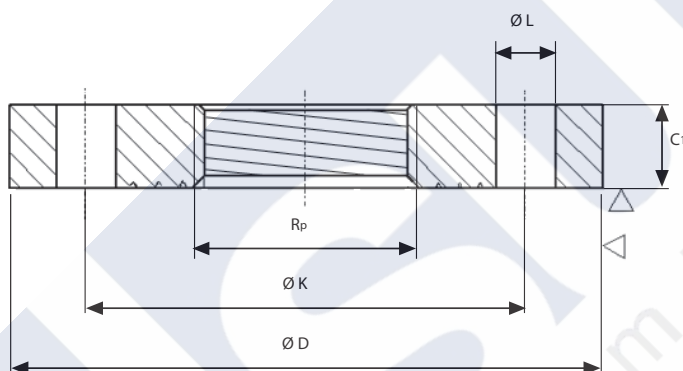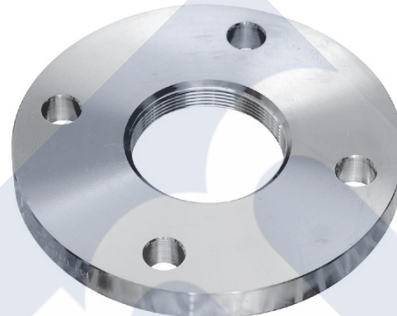

DN	Tubo		Brida			Tornillo			Peso
	d1	Rp	D	C1	K	Cant.	Rosca	L	kg/u.
15	21.3	1/2"95		14	65	4	M12	14	0,669
20	26.9	3/4"	105	16	75	4	M12	14	0,936
25	33.7	1"	115	16	85	4	M12	14	1,110
32	42.4	1.1/4"	140	(16) 18	100	4	M16	18	1,620
40	48.3	1.1/2"	150	(16) 18	110	4	M16	18	1,860
50	60.3	2"	165	(18) 20	125	4	M16	18	2,470
65	76.1	2.1/2"	185	(18) 20	145	(4) 8	M16	18	3,000
80	88.9	3"	200	20	160	8	M16	18	3,790
100	114.3	4"	220	(20) 22	180	8	M16	18	4,030

(*) Medidas entre paréntesis según norma DIN 2576 PN10