

## LEVEL GAUGE WITH VALVE

### MAIN CHARACTERISTICS


The brass level indicator is dedicated to the visual indication of a tank level. The indicator give a direct reading of the level through a transparent tube. It is provided with two needle valves allowing isolating the tube of reading. It can be equipped with plastic or glass transparent tube. The indicator is an economic solution to the level visualization of clean, not aggressive liquids, at low pressure and ambient temperature.

### AVAILABLE MODELS

Diameters 1/4" to 3/4".  
BSP Thread end connections.

### LIMITS OF USE

<b>PS fluid :</b>	10 bar
<b>TS fluid :</b>	-10 °C / + 90 °C

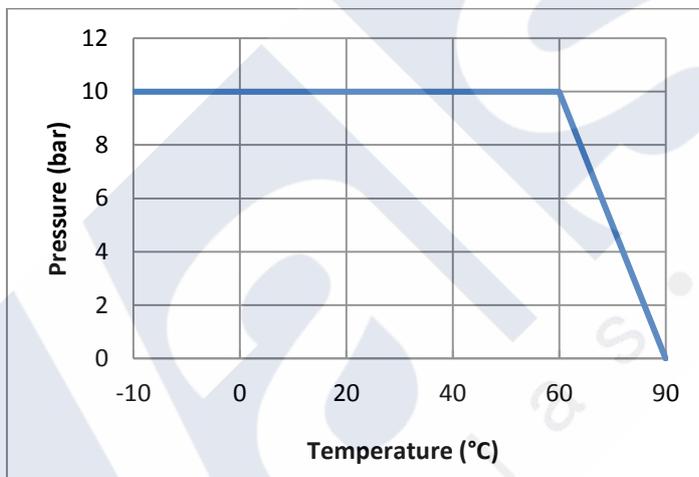

### REGULATIONS AND STANDARD OF CONSTRUCTION

ITEM	Standard
P.E.D 97/23	Excluded
Materials of brass	EN 1503-4
Thread	ISO 228


## LEVEL GAUGE WITH VALVE

### DIMENSIONS (mm) AND CONNECTIONS

CONNECTIONS	∅ Tube	A	A1	B	H1	H2	C	V	Weight (Kg).
G 1/4" M	10	41	17	30	73	31	11	55	0,5
G 3/8" M	13	43	19	38	71	38	17	55	0,7
G 1/2" M	13	43	19	42	71	42	18	55	0,7
G 1/2" M	16	43	19	42	71	42	18	55	0,7
G 3/4" M	18	48	24	46	83	45	15	59	1,1
G 3/4" M	20	48	24	46	83	45	15	59	0,9

### CONSTRUCTION

N°	Item	Qty	Material
1	Body	2	Brass CW 614N
2	Nut of tightening	2	Brass
3	Guide ring	2	Brass
4	Hand wheel	2	Aluminium
5	Steam trap	1	Brass
6	Washer	2	Silicone
7	Tube	1	Plastic / Glass

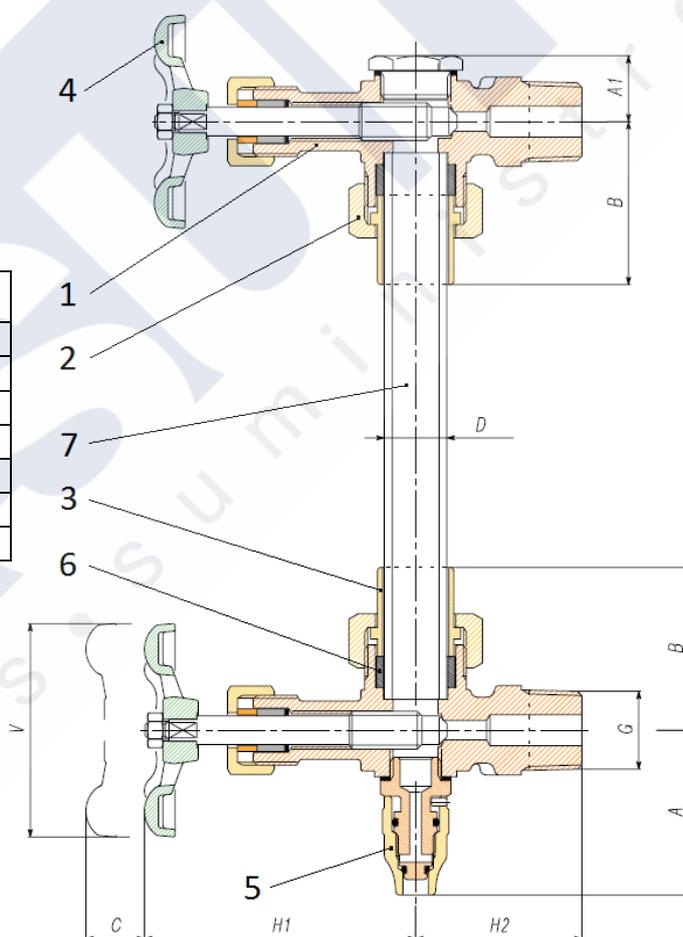

### CALCULATION OF THE LENGH OF THE TUBE

Length of the tube is equal to the face to face dimension less 15mn.