



SOPORTE ELÁSTICO SERIE S



Ref	A	Carga(Kg)	Dureza(Sh)	B	C	D	Flecha
000	40	60	60	23	055	M-8	3,5±0,5
00	60	160	60	28	080	M-10	4,0±1,0
0	70	300	60	32	100	M-12	4,5±1,0
1	85	500	60	32	100	M-12	4,5±1,0
2	100	600	60	40	110	M-14	6,0±1,0
3	120	900	60	50	120	M-16	7,5±1,0
4	140	1200	60	55	120	M-16	8,0±1,0
5	160	1750	60	60	120	M-16	9,0±1,0
6	180	2500	60	70	136	M-24	11,0±1,5
7	205	3500	60	75	137	M-24	12,0±2,0

AMORTIGUADOR RTP




Elemento



Campana



Casquillo

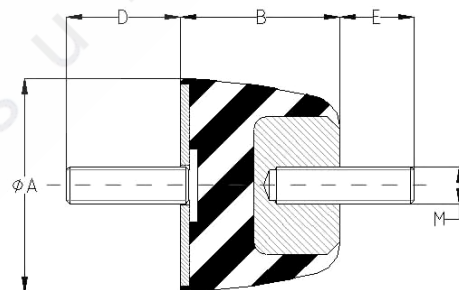

Ref	A	Dureza(Sh)	B	D	M	Carga Compresión(Kg)	Flecha
RTP2	13	9	4	12	20	-	-
RTP4	24	18	6	16	25	-	-
RTP2	50	3	90	12	-	-	-
RTP4	76	5	130	16	-	-	-
RTP2	84	60	52	35	M-12	600	5,0±0,5
RTP4	120	60	75	50	M-16	1500	9,0±1,5
RTP6	140	8	246	24	-	-	-
RTP6	220	60	136	80	M-24	4500	1,0±1,5